




# X1-PC-6U COMPUTER CARD

ID 30601



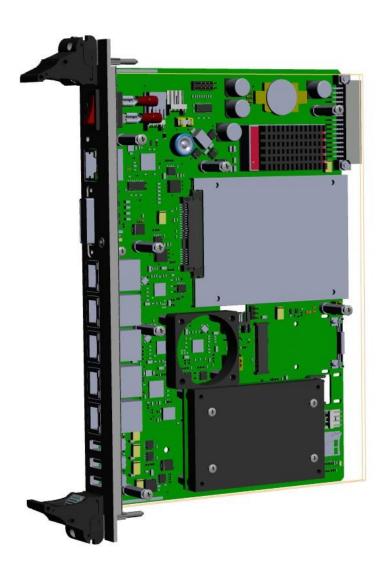





The X1-PC-6U computer card can fulfill all the functions of a PC computer, if the performance parameters of the card allow it.



### **BASIC PARAMETERS:**

**Operating temperature** 

range:

-10°C to +70°C

\_

-40°C to +85°C (optionally)

**Relative Humidity:** to 95%

#### **BUS CONNECTOR INTERFACES:**

**Power supply:**  $24VDC \pm 20\% / 350 \text{ mA}$ 

**Ethernet:** 3x 10/100 Mb/s

2x 10/100/1000 Mb/s

 USB:
 3x USB2.0

 Serial:
 1x RS232

 Video output:
 1x DVI

#### **CONNECTOR INTERFACES ON THE FRONT PANEL:**

**LEDs:** Logic power supply and life indicator

Outputs and inputs status

#### **GALVANIC ISOLATION:**

object / power supply logic 1kV DC ETH port / logic supply 0.5kV DC

## **POSSIBLE MANUFACTURING OPTIONS:**

Conformal coating

#### **DIMENSIONS:**

Card dimensions: Double Eurocard 233x280 mm

Front panel width: 6TE (30 mm) Weight: ca. 300g





#### Rail-Mil Computers sp. z o.o. sp. komandytowa

ul. Kosmatki 82 tel. +48 222 099 450 03-982 Warszawa fax: +48 222 099 455 www.rail-mil.eu biuro@rail-mil.eu

All trademarks and company names are used for informational purposes only and are the sole property of their respective companies.

The catalogue for information purposes only and does not constitute an offer within the meaning of the Civil Code. All specifications are subject to change without notice.