




# X3-IO6

## UNIVERSAL OUTPUT CARD

ID 30202

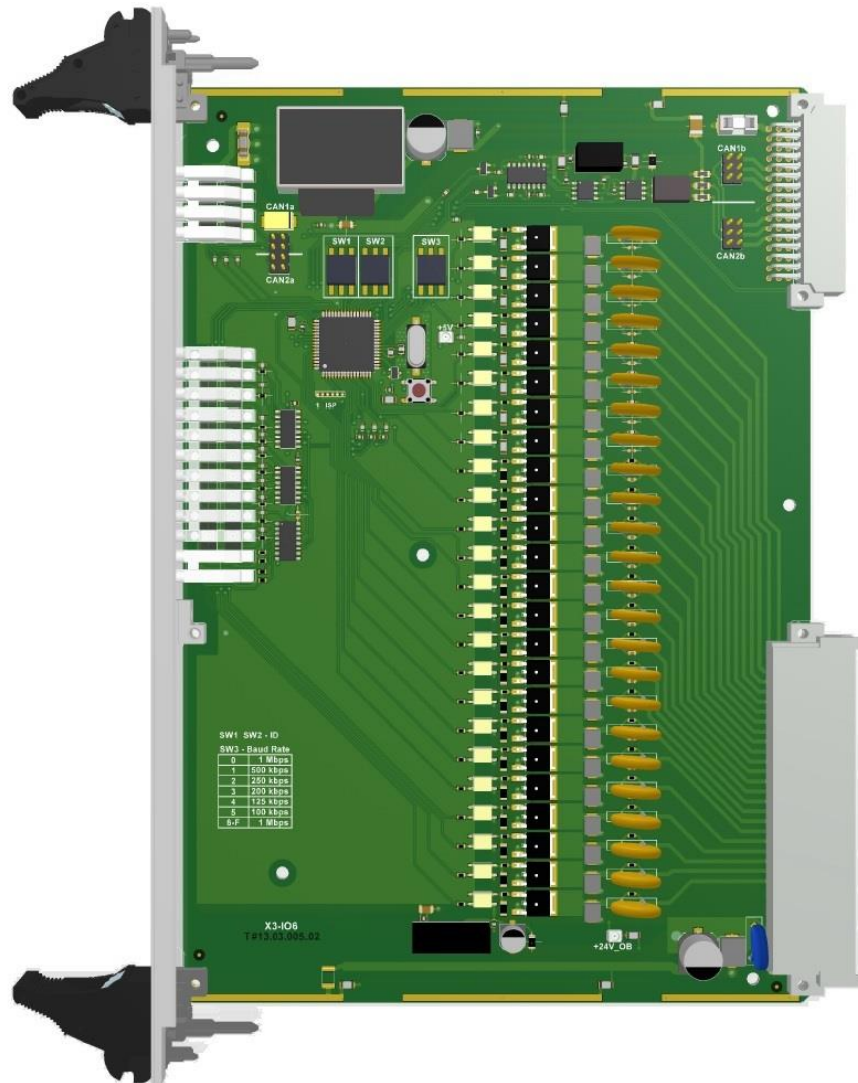

The card is designed to control external devices. The card supports hot-swap capability. Replacement of a damaged module can take place with the power supply of the card cage. Especially useful in harsh industrial environments.



**BASIC PARAMETERS:**

**Operating temperature range:** -10°C to +70°C  
-40°C to +85°C (optionally)

**Relative Humidity:** to 95%

**BUS CONNECTOR INTERFACES:**

**Power supply:** 24V DC ±20% / 130mA

**CAN:** 1 x CAN max 1Mb/s

**Outputs:** 24 x 24VDC / 300 mA

**OTHER INTERFACES:**

**Switches:** 3 x 16-position switch  
SW1 + SW2- module address  
SW3 - transmission speed

**CONNECTOR INTERFACES ON THE FRONT PANEL:**

**LEDs:** Logic power supply and life indicator  
Outputs status

**GALVANIC ISOLATION:**

PE housing / Logic power supply at 3kV DC  
PE housing / Object at 3kV DC  
Object / Logic supply at 3kV DC

**SOFTWARE:**

Integrated

**POSSIBLE MANUFACTURING OPTIONS:**

Conformal coating

**DIMENSIONS:**

Card dimensions: double Eurocard 6U 233x160 mm

Front panel width: 6TE (30 mm)

Weight: ca. 150g

